


ROCK BREAKER

BH-RB-***S/1S: ROCK BREAKER

ALL RIGHTS RESERVED, SUBJECT TO REVISION

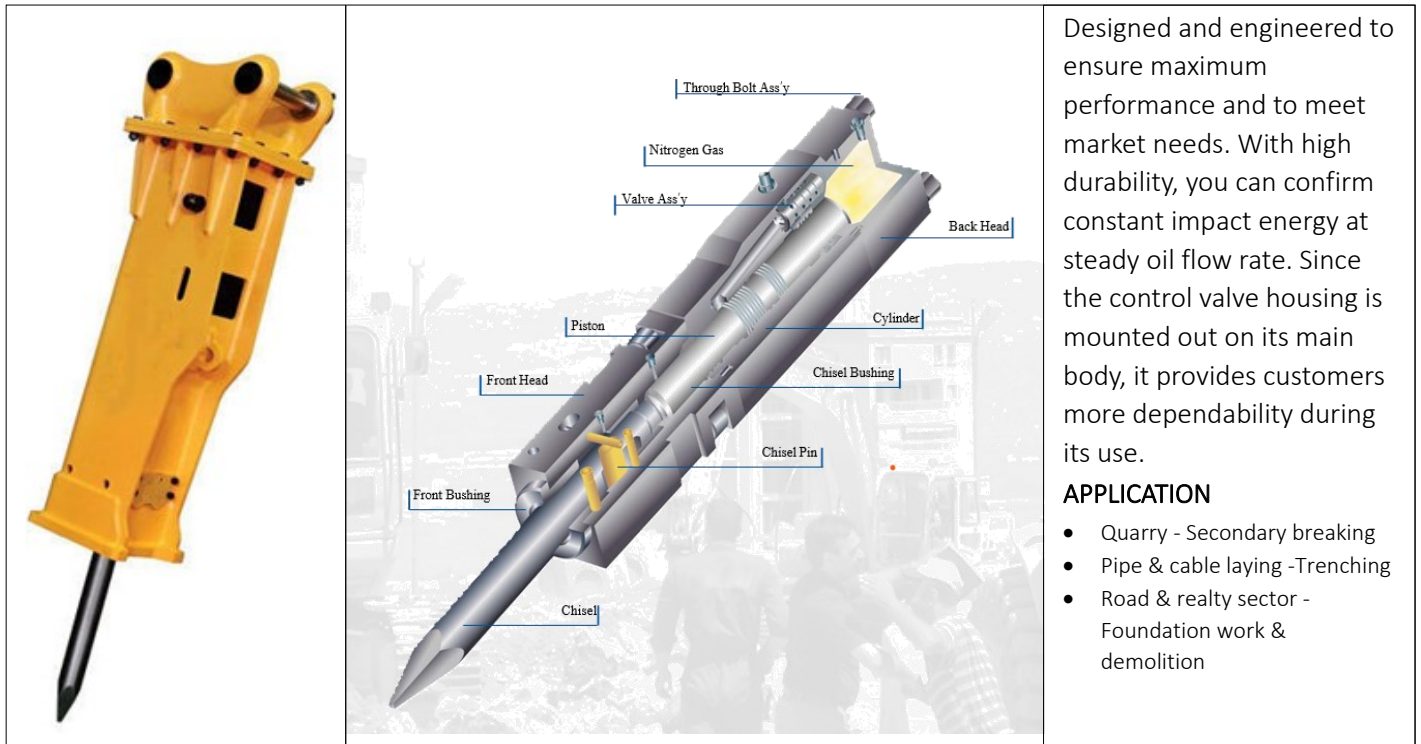

Designed and engineered to ensure maximum performance and to meet market needs. With high durability, you can confirm constant impact energy at steady oil flow rate. Since the control valve housing is mounted out on its main body, it provides customers more dependability during its use.

APPLICATION

- Quarry - Secondary breaking
- Pipe & cable laying -Trenching
- Road & realty sector - Foundation work & demolition

TECHNICAL SPECIFICATIONS					
DESCRIPTION	UNIT	BH-RB-300S	BH-RB-400S	BH-RB-600S	BH-RB-800-1S
Applicable Excavator	Ton	4-7	6-9	11-15	18-26
Operating Weight	Kg	350	380	795	1825
Main Body Weight	Kg	151	210	471	911
Required oil Flow	l/min	40-70	50-90	80-110	120-180
Setting Pressure	bar	170	180	210	220
Operating Pressure	bar	110-140	120-150	150-170	160-180
Impact Rate	bpm	500-900	400-800	350-700	350-500
Tool Diameter	mm	68	75	100	140
Back Head Pressure	bar	16	16	16	16
Impact Energy	Kg-m	70	92	214	429